

A Simple Manual Of Dahua's Net Keyboard (DH-NKB) Connect DVR

By Stanley

Welcome to here! Before you read the following manual please make sure connect the keyboard to network!

1. Setting

1.1 Please connect DC 12V power to the keyboard, wait about 15 sec, You will see the picture in keyboard's LCD like Figure 1-1.

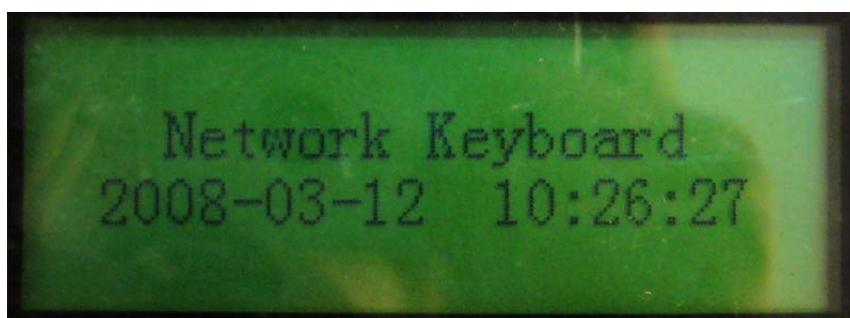


Figure 1-1

1.2 Please press the button of "ENTER", you will enter the login interface, input your Username and Password, Then press "ENTER" to login. like Figure 1-2.

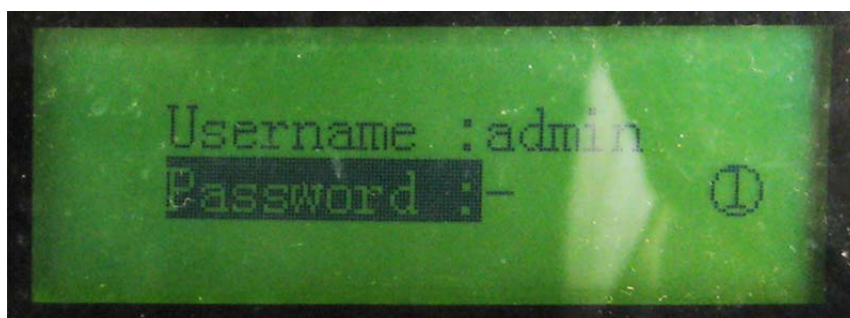


Figure 1-2

1.3 Login successfully; You will see the interface like Figure 1-3.

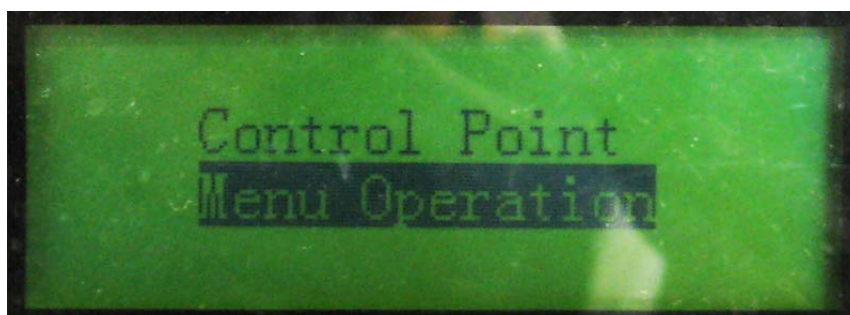


Figure 1-3

1.4 Choose "Menu Operation", Entry the interface like Figure 1-4.

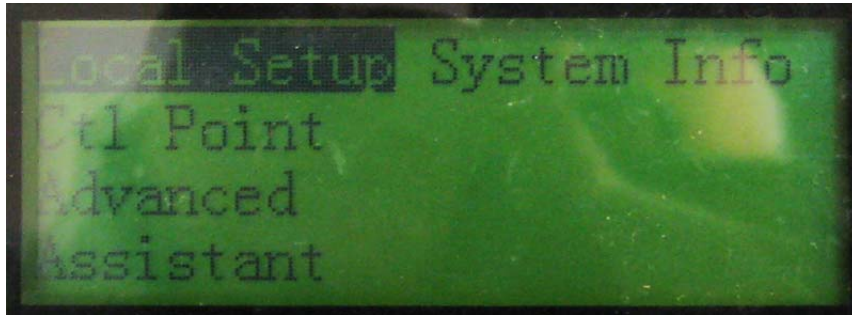


Figure 1-4

1.5 Choose “Local Setup”, Enter the interface like Figure 1-5.

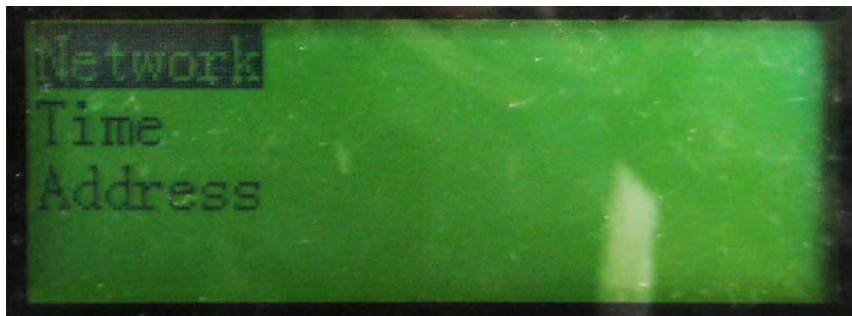


Figure 1-5

1.6 Choose “Network”, Enter the interface like Figure 1-6. Here you can input the Keyboard’s network information.

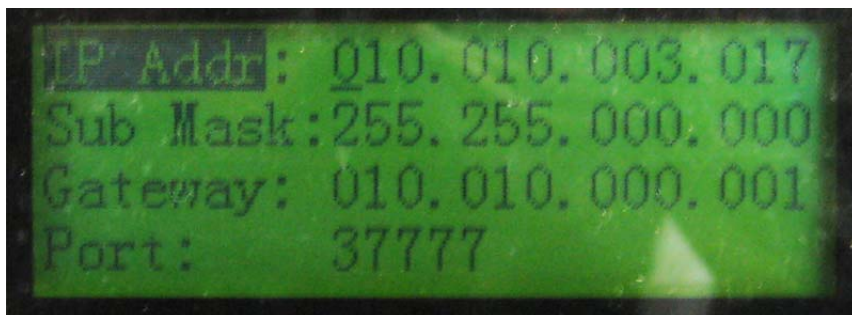


Figure 1-6

Note: After you input information please press “ENTER” to save it.

1.7 Then press “ESC”, Return the interface like Figure 1-4, see Figure 1-7.

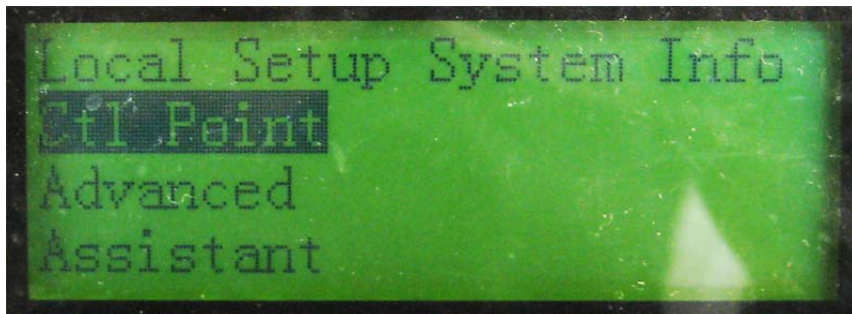


Figure 1-7

1.8 Choose “Ctl Point”, Enter the interface like Figure 1-8, Here you can input the DVR’s information, Please choose Dev Type: DVR and Connect Type: Network (You can Choose it by the button “←”or “→”), See Figure 1-8.

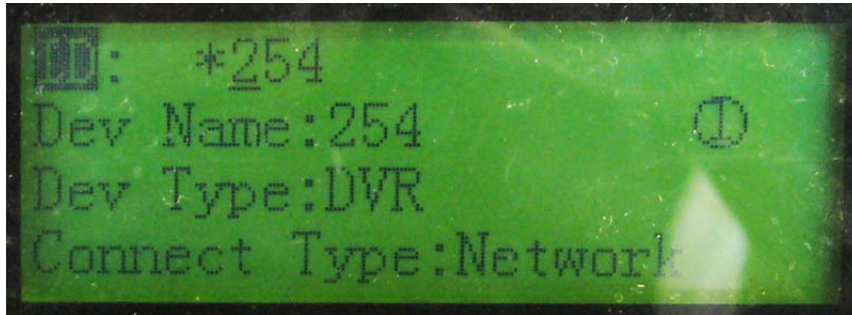


Figure 1-8

1.9 Choose “Connect Type: Network”, See Figure 1-9, Entry the interface like Figure 1-10, Here you can input the DVR’s network information like IP Address and Port, See Figure 1-10.

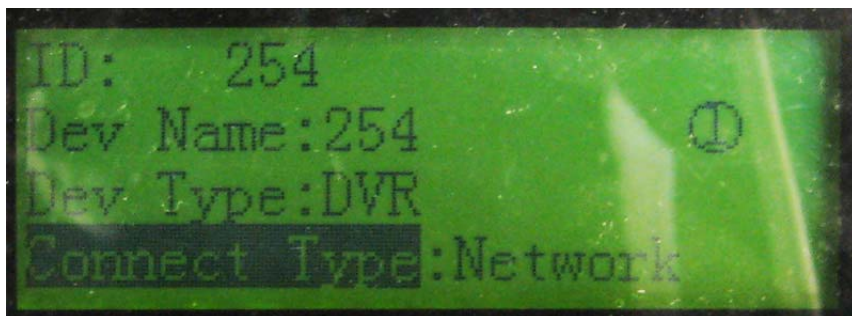


Figure 1-9



Figure 1-10

Note: You can find the DVR’s network information in DVR’s GUI interface, see Figure 1-11.

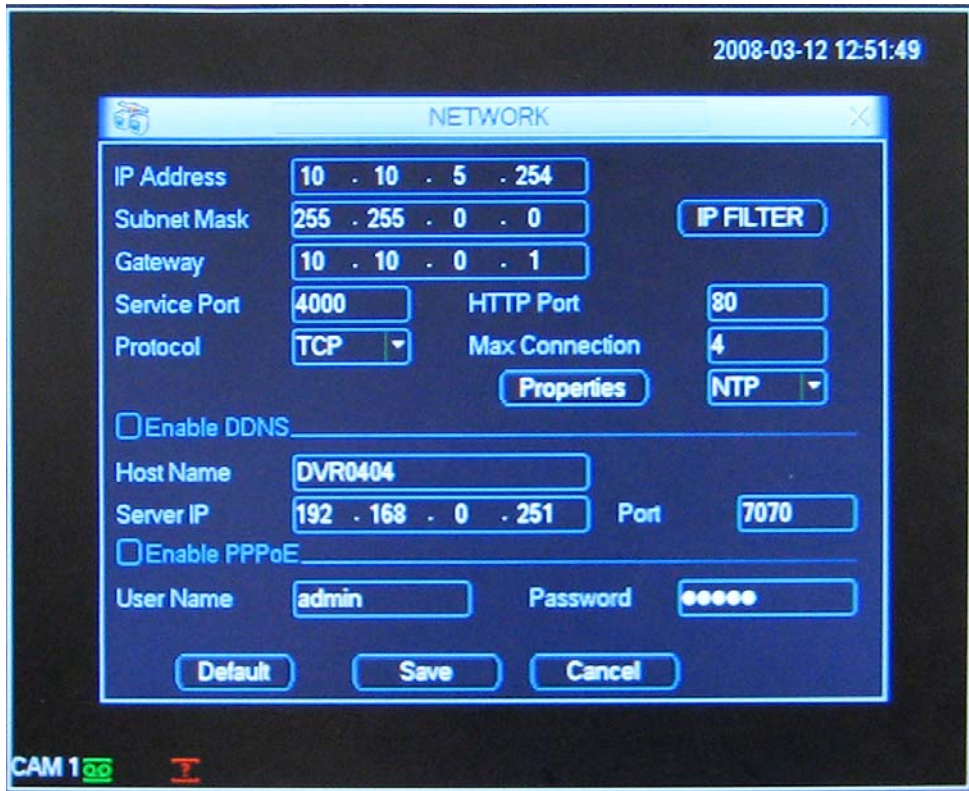


Figure 1-11

1.10 Press "ESC" to exit, The system will clue to you to save it, Press "ENTER" to save it, see Figure 1-12.

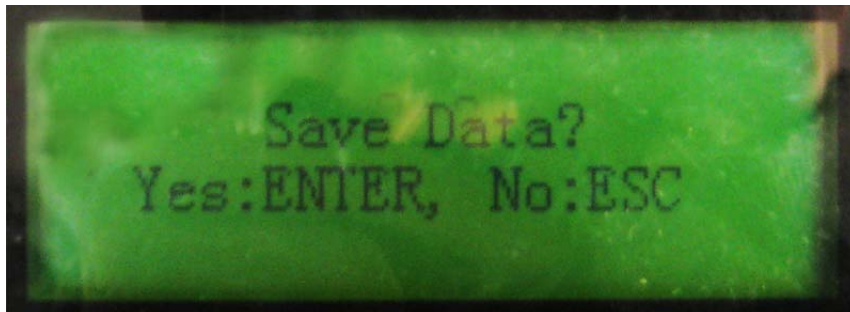


Figure 1-12

To here, You are completed the setting!

2. Connecting

2.1 Follow the part 1.10, Press "ESC" return to the interface

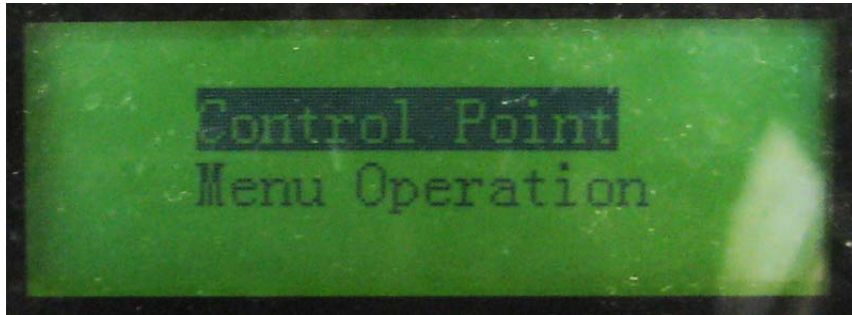


Figure 2-1

2.2 Choose "Control Point"



Figure 2-2

2.3 Input DVR's ID

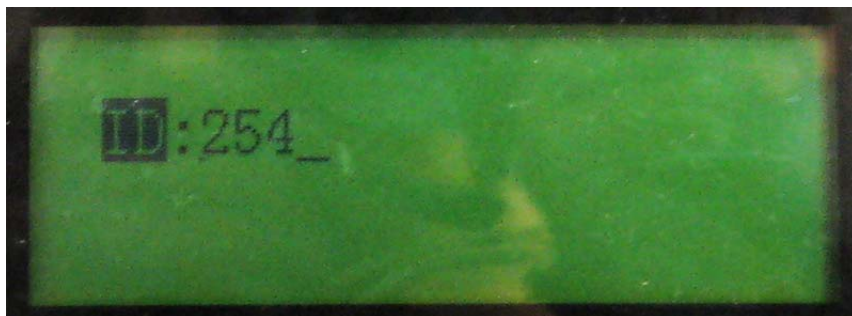


Figure 2-3

2.4 Connect successfully



Figure 2-4

Then, you can press the number key of the keyboard to switch the window.