



N336ZD3/P

# FLIR IP™

## 2.1MP 30× PTZ IP Camera

The FLIR 1080p HD 30× PTZ IP camera delivers outstanding picture quality both day and night – even in harsh weather conditions – for optimized perimeter monitoring. The powerful 30× optical zoom enables clear identification of objects at extended distances.

### HD IN REAL TIME

*Outstanding picture quality day and night*

- Supports 1080p HD @ 25/30 fps
- 2.1 MP HD, 1/2.8" CMOS Progressive Scan
- 330ft / 100m IR night vision range for total visibility day or night

### 30× OPTICAL ZOOM

*PTZ perimeter monitoring and identification at extended distances*

- 30× optical zoom (4.3 - 135mm) enables extended-range identification
- High speed 350°/s pan speed, 360° continuous pan rotation
- Up to 300 preset positions, 5 auto scans, 8 tours, 5 patterns

### RUGGED DESIGN

*ArcticPro technology with built-in heater and IP66 weatherproof*

- ArcticPro technology for harsh climates (minimum operating temperature -40°F / -40°C)
- IP66 weatherproof with included wall mount bracket – ceiling mount available
- PoE+ (802.3at) power option

### FLIR CLOUD™ REMOTE VIEWING

*Remote access via iOS, Android, PC/Mac when connected to a FLIR NVR*

- Centralized viewing and control of up to 64 cameras on each screen with PC/Mac
- Access live or recorded video at any time on your iPhone / Android / iPad
- Advanced mobile app features including remote playback, push notifications for motion/alarm, E-map, manual record/snapshot to device




FLIR Cloud™



## Specifications

CAMERA	
Imaging Device	2.1 MP, 1/2.8"
Effective Pixels	1944x1092
Imager Type	CMOS
Image Readout	Progressive Scan
Day/Night	Auto / Color / BW
Day/Night Delay Adjustment	Yes
Mechanical IR Cut Filter	Yes
Min. Illumination	0.05lux @ 40IRE F1.6 (Color) 0.005lux @ 40IRE F1.6 (B/W)
S/N Ratio	≥ 50dB
Field of View (H)	65.1° ~ 2.34°
IR Illumination / Type	330ft (100m) / 850nm
IR On/Off Control	Yes
Video Output	RJ45
Electronic Shutter Range	1/3 (1/4) ~ 1/30,000s
OPTICAL	
Lens Type	Zoom
Focal Length	4.3 - 135mm
Aperture	F1.6 - F5.0
Optical Zoom	30x Optical
Focus	Auto / Manual
Iris Control Type	Auto / Manual
PAN/TILT	
Pan / Tilt Range	Pan: 0° ~ ±180°/ Tilt: -15° ~ 90°
Auto Flip	Yes, 180°
Continuous Rotation	Yes
Manual Speed (Maximum)	Pan: 300°/sec / Tilt: 200°/sec
Preset Speed (Maximum)	Pan: 350°/sec / Tilt: 300°/sec
Presets	300
Patterns	5
Tours	8
Other PTZ Functions	5 Auto Scans, Auto Pan
VIDEO	
Video Compression	H.264 / H.264H / MJPEG
Video Streams	H.264H / MJPEG Triple Stream
Resolution Selection	1080p (1920x1080) / 720p (1280x720) / D1 (704x576 / 704x480) / CIF (352x288 / 352x240)
Aspect Ratio	16:9
Frame Rates (Maximum)	1080p @ 25/30fps
Bit Rate Control	CBR / VBR (with cap)
Bit Rate Selection	H.264H: 488K~8129Kbps, MJPEG: 56K~20480Kbps
Quality Setting Range (Default)	1-6 (4)
Region of Interest (Selectable Areas)	Yes (4)
Dynamic Range	Up to 50dB
Wide Dynamic Range	Digital WDR
Backlight Compensation	BLC / HLC
White Balance	Auto / Manual
Gain Control	Auto / Manual
Noise Reduction	2D+3D

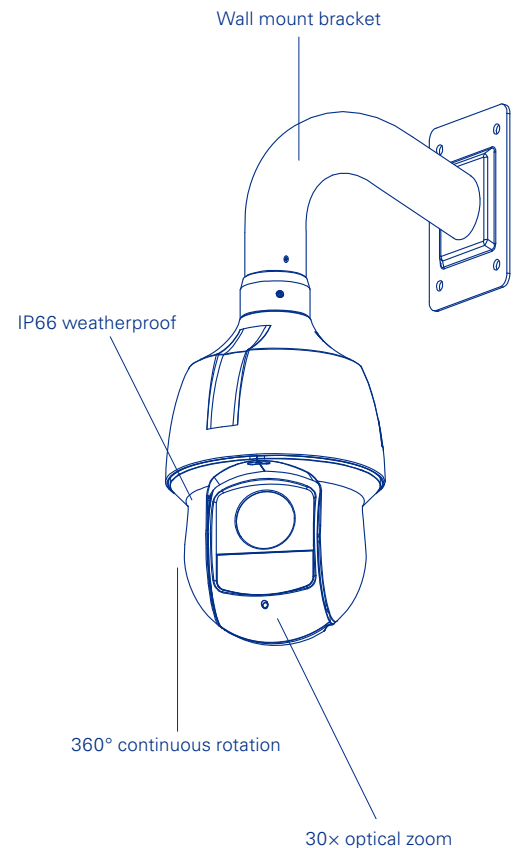

## Specifications

Smart IR	Yes, User Adjustable
Image Stabilization	No
Digital Zoom	4x
Tamper Detection	Yes
Adaptive Lens Correction (ALC)	No
Video Mirroring / Rotation	Horizontal
Video Overlay	Time / Date / Camera / Custom
Window Blanking (Privacy)	Up to 4 Areas
Menu Languages	English
<b>NETWORK</b>	
Protocols	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
ONVIF Conformance	ONVIF Profile S
RTSP Video	Standard RFC2326, Support QuickTime/VLC
Users	Unicast - Up to 20 Users; Multicast - Up to 20 Users
<b>AUDIO</b>	
Input/Output	1 Input / 1 Output
Encoding	G.711a / G.711u / PCM
<b>MECHANICAL</b>	
Camera Body Material	Aluminum Alloy
Bubble Material	Polycarbonate
Product Dimensions (W x H) (Dome only)	Φ7.3 x 12.2" / Φ186 x 310mm
Product Weight	7.7lbs / 3.5kg
<b>ELECTRICAL</b>	
Network Port	RJ45, 10/100 Base-T
Power Input	24V AC
Power over Ethernet Type (PoE)	PoE+ (802.3at)
Power Consumption (Maximum)	23W (IR on)
Current Consumption (Maximum)	1650mA
Edge Storage	Yes, microSD, Max 128GB
Built-in Heater	No
Alarm I/O	2 Inputs / 1 Outputs
<b>ENVIRONMENTAL</b>	
Storage Temperature	-40° ~ 158°F / -40° ~ 70°C
Storage Humidity	< 90% RH
Operating Temperature	-40° ~ 158°F / -40° ~ 70°C
Operating Humidity	< 90% RH
Cold Start Temperature	-40°F / -40°C
Ingress Protection	IP66 Rated
Vandal Resistance	N/A
<b>PRODUCT INFORMATION</b>	
Weight	13lbs / 5.9kg
Package Dimensions (L x W x H)	10 x 10 x 16.5" / 254 x 254 x 419mm
Package Cube	0.95 cbf / 0.027 cbm

