

# IR Megapixel Vari-focal MiniDome

## 1.3MP MiniDome Network Camera



- Max 30fps@1.3MP (1280×960)
- DWDR
- True Day/Night
- Motorized Lens 2.7mm-12mm
- Smart IR 30m (98ft)
- Outdoor Rated IP67
- Vandal Resistant IK10
- Onboard Storage



### System Overview

The IR Megapixel Vari-focal MiniDome camera delivers 1.3MP resolution with a motorized 2.7mm – 12mm vari-focal lens. The camera's elegant blend of aesthetics combined with a range of easy mounting solutions provides an excellent choice for a variety of small to mid-size applications at an affordable price.

### Functions

#### True Day/Night

A day/night mechanical IR cut filter makes this camera ideal for applications with fluctuating lighting conditions, delivering color images during the day and automatically switching to monochrome as the scene darkens.

#### Regions of Interest

Regions of Interest (ROI) is a user defined feature that allows the operator to monitor specific areas of a scene while still maintaining overall situational awareness of less important areas.

#### Smart IR

With IR illumination, the camera has the ability to capture detailed images in low light or total darkness. The camera's Smart IR technology adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object. Smart IR technology prevents IR LEDs from whitening out images as they come closer to the camera. The camera's integrated infrared illumination provides high performance in extreme low-light environments up to 30m (98ft).

#### Motorized Lens

With a motorized lens, focusing the camera is quick and convenient for both the initial installation and future adjustments. Simply install the camera, dial in the lens, and then make adjustments from the convenience of your computer. For sites that require lens adjustments, remote focus eliminates the hassle of driving to the site deploying a ladder, or spending time away from the office.

#### Image Flip

Capturing unnecessary data such as surrounding hallway walls can increase storage requirements without any added value. The image flip feature allows the camera's image to be rotated in 90° increments for better video optimization.

#### Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust to IP67 standards, making it suitable for indoor or outdoor environments. With its IK10 rated impact resistant design, the camera provides maximum durability against vandals making it capable of withstanding the equivalent of 55 kg (120lbs) of force.

Supporting ±25% input voltage tolerance, this camera suits even the most unstable conditions for outdoor applications. Its 8KV lightning rating provides protection against the camera and its structure from the effects of lightning.

#### Streaming

With a choice of unicast or multicast streaming, bandwidth-efficient viewing, recording and third-party video management can easily be achieved. Dual streaming enables bandwidth-efficient viewing and recording. Depending on the resolution and frame rate selected on the first stream, the second stream provides a copy at a lower resolution.

#### Interoperability

The camera conforms to the ONVIF (Open Network Video Interface Forum) and PSIA (Physical Security Interoperability Alliance) specifications, ensuring interoperability between network video products regardless of manufacturer.

## Technical Specification

### Camera

Image Sensor	1/3" CMOS
Effective Pixels	1355 (H) x 977 (V)
Scanning System	Progressive
ROM / RAM	16MB / 256MB
Electronic Shutter Speed	1/3(4) ~ 1/100,000s
Minimum Illumination	Color: 0.1Lux@F1.4; B/W: 0.01Lux@F1.4; 0 Lux (IR on)
S/N Ratio	More than 50db
IR Distance	Distance Up to 30m (98ft)
IR On/Off Control	Auto/ Manual
IR LEDs	2

### Lens

Lens Type	Motorized Lens
Mount Type	Board-in
Focal Length	2.7mm-12mm
Max Aperture	F1.4
Angle of View	H: 92°~28° V:48°~18°
Focus Control	Motorized
Close Focus Distance	1300mm~23000mm (4.27 ft - 75.46 ft)

### Pan/Tilt Range

Pan/Tilt Range	Pan: 0° ~ 360°; Tilt: 0° ~ 80°, Rotation: 0° ~ 360°
----------------	---

### Video

Compression	H.264 / MJPEG
Streaming Capability	2 Streams
Resolution	1.3MP (1280×960)/ 720p (1280×720) / D1 (704×576/704×480) / CIF (352×288/352×240)
	Main Stream 1.3MP (1~30fps), 720P (1 ~ 30fps)
	Sub Stream 1 D1/CIF (1 ~ 30fps)
Bit Rate Control	CBR / VBR
Bit Rate	H.264: 4K ~ 8192Kbps
Day/Night	Auto (ICR) / Color / B/W
BLC Mode	BLC / HLC / DWDR
White Balance	Auto/Sunny/Night/Outdoor/Customized
Gain Control	Auto / Manual
Noise Reduction	3D DNR
Motion Detection	Off / On (4 Zone, Rectangle)
Region of Interest	Off / On (4 Zone)
Smart IR	Support
Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On
Privacy Masking	Off / On (4 Area, Rectangle)

### Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	20
Edge Storage	NAS (Network Attached Storage), Local PC for instant recording, 128GB
Web Viewer	IE10....
Management Software	Smart PSS, DSS
Smart Phone	Android, ios

### Certifications

Certifications	FCC (SEFD1508235-A) UL (E234884-A94-UL)
----------------	--

## Electrical

<b>Power Supply</b>	12V DC $\pm$ 25%, PoE (af Class 0)
<b>Power Consumption</b>	Max. 4.5W (12V DC, IR On), Max. 4.5W (PoE, IR On)

## Environmental

<b>Operating Conditions</b>	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
<b>Storage Conditions</b>	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
<b>Ingress Protection &amp; Vandal Resistance</b>	IP67, IK10

## Construction


<b>Casing</b>	Metal
<b>Dimensions</b>	$\phi$ 122mm $\times$ 88.9mm (4.8" $\times$ 3.5")
<b>Net Weight</b>	0.40Kg (0.88lb)
<b>Gross Weight</b>	0.54Kg (1.19lb)

## Ordering Information

Type	Part Number	Description
1.3MP Camera	DH-IPC-HDBW21AORN-ZS	1.3MP, 2.7mm-12mm, True D/N, DWDR, 30fps@1.3MP, 30fps@720p, IP67, IK10, IR: up to 30m (98ft), DC12V, PoE
	PFA137	Junction Box
Accessories	PFB203W	Wall Mount Bracket
	PFA152	Pole Mount Bracket (for use with PFA203)
	PFB200C	In-ceiling Mount
	PFA150	Pole Mount Bracket (for use with PFA137)
	PFA151	Corner Mount Bracket (for use with PFA137)

## Accessories

Optional:

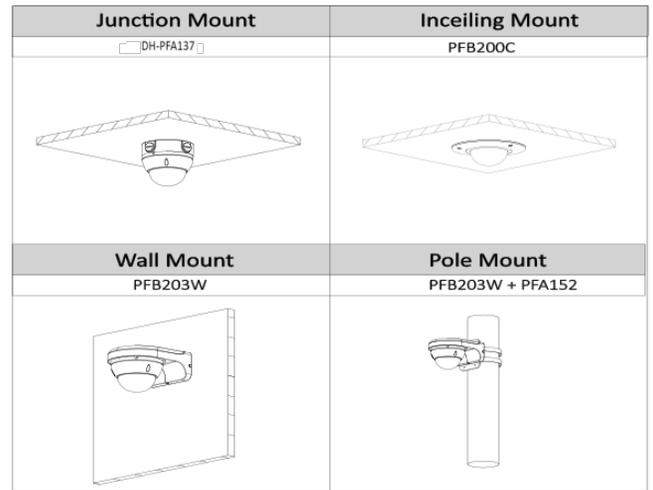

## Dimensions (mm/inch)

