

# 24-channel 4K Network Video Recorder

1U 24-port PoE 4K SATA Network Video Recorder





## **System Overview**

Dahua's Pro Series network video recorders offer excellent performance and high recording quality for IP video surveillance applications. For applications where details are critical for identification, this professional NVR provides a powerful processor with up to 4K resolution. Additionally, the NVR features a mouse shortcut operation menu, remote management and control, center storage, edge storage, and back up storage.

Designed as a cost-effective and easy to install recorder, this NVR is an ideal addition to any security system that monitors public spaces, water conservancy, transportation, city centers, schools, and financial institutions

The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and it is compatible with ONVIF 2.4, enabling interoperability when combined with 4K cameras.

#### **Functions**

#### **Dewarping Mode**

The NVR has the ability to correct the distortion in a circular panoramic view produces by a fisheye lens. The NVR offers various dewarping modes for different installations and configurations.

## N+M Hot Standby

The highly reliable N+M Hot Standby redundancy design provides a secure, fail-over technique ensuring immediate backup. In the event of a system failure, the slave instantly takes over the master ensuring no data is lost.

#### Smart Motion Detection

Smart Motion Detection, a component of Dahua's Analytics+ technology, improves alarm accuracy and decreases the number of false alarms. The advanced SMD algorithm analyzes a scene for human or vehicle motion, while filtering out other motion due to trees, leaves, animals, weather, and triggers an alarm when detected¹.

- Smart H.265+ and Smart H.264+ Video Compression
- · Maximum 320 Mbps Incoming Bandwidth
- Up to 12 MP Resolution for Preview and Playback
- Support for IPC and UPnP Protocols
- 24 PoE Ports
- Customized Live View Layout with Support for Panoramic Displays
- Intelligent Video System with Business Analytics
- Compatible with Dahua Smart Motion Detection Cameras
- 3D Intelligent Positioning with Dahua PTZ Cameras



### Intelligent Video System (IVS) Recording

With built-in intelligent video analytics, the NVR has the ability to detect and analyze moving objects for improved video surveillance. The NVR provides standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed, People Counting, ideal for business intelligence, and Facial Detection, for searching or identification of individuals.

### 4K Resolution

4K resolution is a revolutionary breakthrough in image processing technology. 4K delivers four times the resolution of standard HDTV 1080p devices and offers superior picture quality and image details. 4K resolution improves the clarity of a magnified scene to view or record crisp forensic video from large areas.

## Face Recognition

The NVR stores face recognition video and data from a dedicated facial recognition camera connected to the NVR. The NVR triggers an event if the recognition database on the camera detects a face match.

#### Heat Map

The Heat Map option highlights the areas with the highest concentration of people. This information can then be exported into a customized report to assist in business or forensic analysis.

#### Automatic Network Replenishment Technology (ANR)

Network Video Recorders with the ANR function automatically store video data on an IP camera SD card when the network is disconnected. After recovery of the network, the NVR automatically retrieves the video data stored on the camera.

## Automatic License Plate Capture

The NVR automatically captures and stores vehicle license plate images from a dedicated license plate capture camera connected to the NVR. During playback, an operator can perform a license plate search by Time and Date to view thumbnail images of all plates captured during the specified time period. License plate capture technology offers effective entrance/exit management, traffic surveillance, and parking lot monitoring.

Technical Specification		Network			
System		Ethernet	One (1) RJ-45 Port (10/100/1000 Mbps)		
Main Processor	Embedded Quad-core Processor	PoE	24 Ports (IEEE802.3af/at), 10/100 Mbps		
Operating System	Embedded Linux	Forwarding Rate	320 Mbps		
Audio and Video  IP Camera Input	24 Channels	Network Function	HTTP, HTTPs, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTF Alarm Server, IP Search (Support for Dahua IP cameras, DVRs, NVS)		
Two-way Talk	Input: One (1) Channel, RCA Output: One (1) Channel, RCA	Maximum User Access	128 Users		
Display		Mobile Operating System	IOS, Android		
Interface	One (1) HDMI Port (4K) One (1) VGA Port (1080p)	Interoperability	ONVIF 2.4, CGI Conformant		
Resolution	3840 x 2160, 1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768	Storage			
Multi-screen Display	1/4/8/9/16/25	Internal HDD	Two (2) SATA III Ports, Up to 10 TB capacity for each HDD		
On-screen Display	Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording	HDD Mode	Single		
Recording		Auxiliary Interface	Auxiliary Interface		
Compression	Smart H.265+, H.265, Smart H.264+, H.264, MJPEG	USB	One (1) USB 3.0 Port, rear panel One (1) USB 2.0 Port, front panel		
Resolution	12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 1.3 MP, 720p, D1, CIF	RS232	One (1) Port for PC Communication and Keyboard		
Fisheye Dewarping	One (1) Channel of 12 MP	Electrical			
Recording Bit Rate	320 Mbps	Power Supply	Single, 100 VAC to 240 VAC, 50/60 Hz		
Bit Rate	16 Kbps to 20 Mbps per channel	Power Consumption	< 16 W, without HDD		
Record Mode	Manual, Schedule (Regular, Motion Detection), Alarm, IVS, Stop	Total PoE Power	25.5 W single port, 220 W total		
Record Interval	1 to 120 minutes (default: 60 minutes) Pre-record: 1 to 30 s	Environmental			
\".\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Post-record: 10 to 300 s	Operating Conditions	-10° C to +55° C (+14° F to +131° F)		
Video Detection and Alarm		Storage Conditions	-20° C to +70° C (-4° F to +158° F), 0 to 90% RH		
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips	Construction			
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss and Tampering	Dimensions	1U, 440.0 mm x 419.96 mm x 43.65 mm (17.30 in. x 16.50 in. x 1.70 in.)		
Alarm Input	Four (4) Channels, Low Level Effective, Green Terminal Interface	Net Weight	4.50 kg (9.90 lb), without HDD		
Relay Output	Two (2) Channels, NO/NC Programmable, Green Terminal Interface	Gross Weight	6.45 kg (14.20 lb)		
Playback and Backup		Installation	Rack-mounted		
Sync Playback	1/4/9/16	Certifications			
NVR Video Output	Four (4) Channels at 4K or 16 Channels at 1080p	Safety	UL 60950-1 CAN/CSA C22.2 No.60960-1		
Search Mode	Time/Date, Alarm, MD and Exact Search (accurate to one second)	Electromagnetic Compatibility	FCC Part 15 Subpart B ANSI C63.4-2014		
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom	(EMC)	ANSI C05.4-2014		
Backup Mode	USB Device, Network				
Third-party Support					
Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and others				

#### Camera Support


Thermal Cameras	16 Channels		
Analytics+ Cameras			
Face Recognition	Four (4) Channels		
Perimeter Protection	16 Channels		
Metadata	16 Channels		
Smart Motion Detection	Any channel connected to a Dahua Network camera with Smart Motion Detection		

## Intelligence


IVS triggers an alarm and takes a defined action for the following events:				
Standard Features	<ul> <li>Tampering with the camera.</li> <li>Camera loses or changes focus drastically.</li> <li>Error writing to an onboard Micro SD card.</li> <li>Error sending or receiving data over the network.</li> <li>Unauthorized access to the camera.</li> </ul>			
Premium Features				
Motion	An object moves through any part of the scene.			
Tripwire	A target crosses a user-defined line.			
Intrusion	A target enters or exits a defined perimeter.			
Scene Change	A person or object moves the camera to change the scene or covers the camera to obscure the scene.			
Abandoned/Missing Object	A target leaves an object in designated area, or a target removes an object from the same designated area.			
Advanced Features				
Facial Detection	Detects and captures a snapshot of a human face in a defined area within a scene.			
Face Recognition	Triggers an event if the connected facial recognition camera matches a face to one stored on the camera's database.			
People Counting	Measure the number of customers, visitors or passengers in a surveillance scene.			
Heat Map	Generates a visual representation of data.			

#### **Ordering Information** Туре Part Number Description 24-channel 1U 24 PoE Ports 4K H.265 N52A4P1 Network Video Recorder, 1 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P2 Network Video Recorder, 2 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P3 Network Video Recorder, 3 TB 24-channel 1U 24 PoE Ports 4K H.265 24-channel NVR N52A4P4 Network Video Recorder, 4 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P6 Network Video Recorder, 6 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P8 Network Video Recorder, 8 TB 24-channel 1U 24 PoE Ports 4K H.265 N52A4P12 Network Video Recorder, 12 TB Rack Mount Tray, compatible with 1U, Mini 1U, Accessory, and Compact 1U Storage Devices PFH101 Optional 482.60 mm x 281.20 mm x 43.70 mm (19.0 in. x 11.07 in. x 1.72 in.)

## Dimensions (mm/in.)

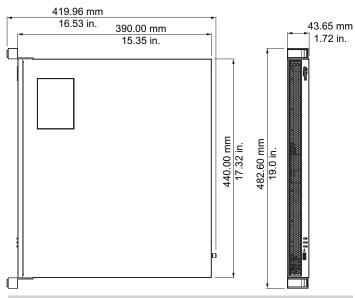

#### **Rear Panel**



1	Power Input	6	VGA Output
2	On/Off Button	7	HDMI Output
3	PoE Ports (x24)	8	RS232 Port
4	Alarm Input/Output	9	USB 3.0 Port
5	Ethernet Port (1000 Mbps)	10	Audio Input/Output

<sup>1.</sup> The recorder SMD functions are available only when connected to a Dahua network camera with SMD functionality. Pair a Smart Motion Detection camera with a Dahua recording device that also offers SMD  $functionality\ to\ take\ advantage\ of\ SMD\ alarm\ filtering\ and\ object\ classification\ when\ searching\ and$ playing back recorded video.

